


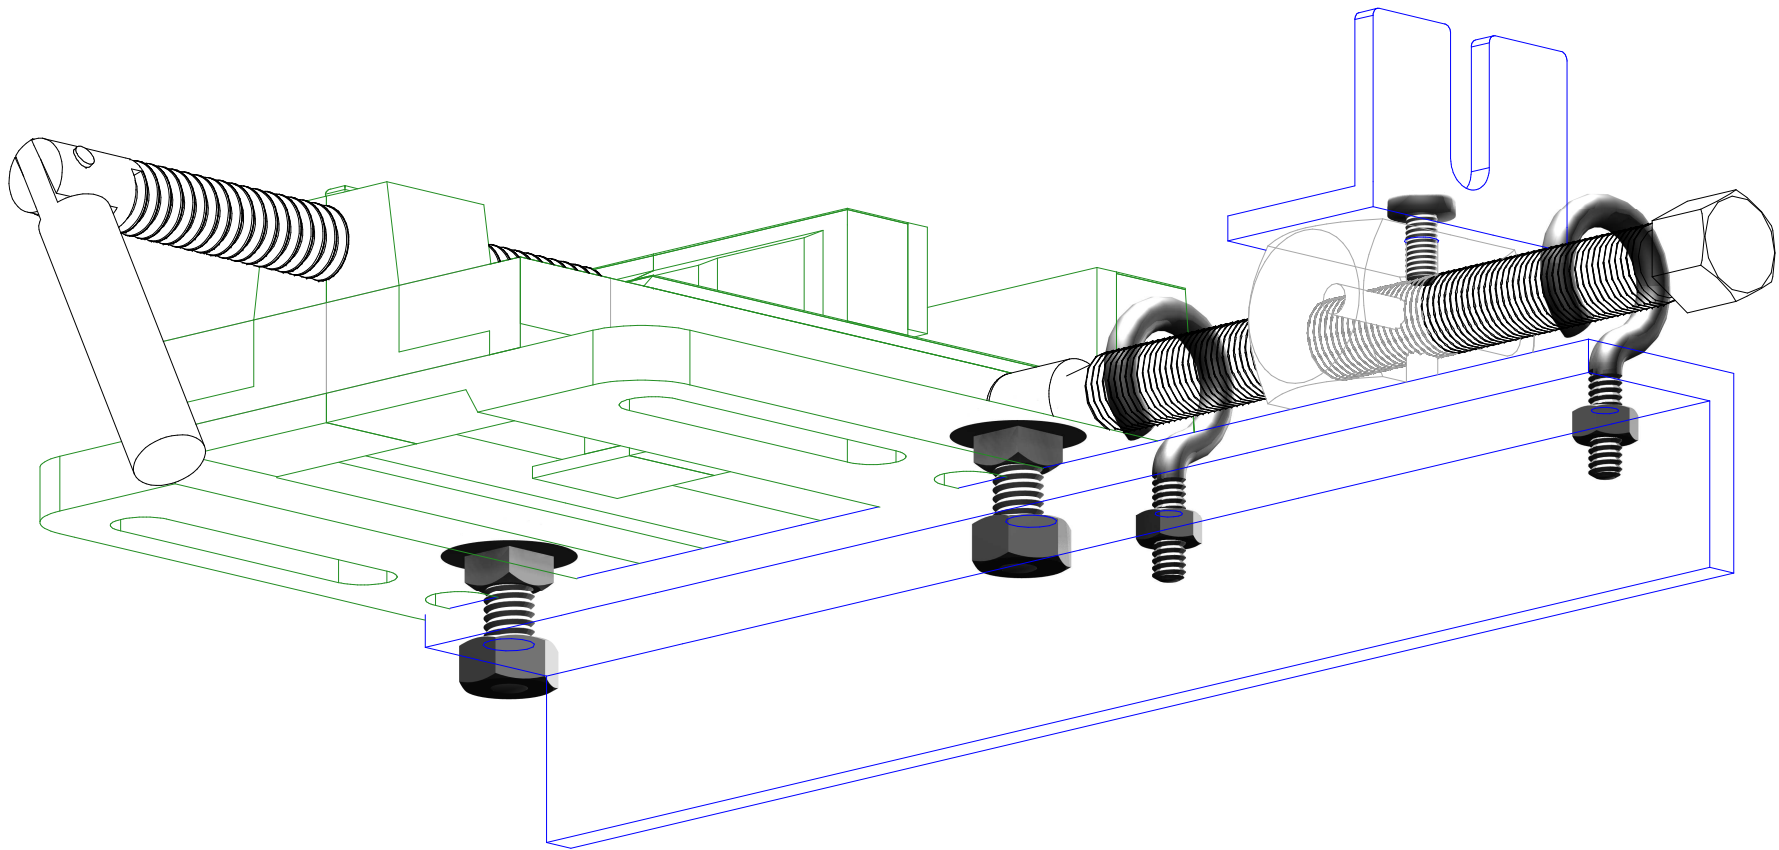

Carriage bolts secure vise to main beam.

Eye bolts thread into main beam, and are locked in position by hex nuts.

Pan head bolt secures claw to carriage.

Shaft Puller

Dave Tutelman

2011 / 11 / 24

Sheet 8 of 8:
Hardware
placement